

# DACx3508 Octal, 10-Bit or 8-Bit, SPI Interface, Buffered Voltage Output DACs in Tiny 3 × 3 WQFN Package

## 1 Features

- $\pm 1$ -LSB INL and DNL
- Wide operating range
  - Power supply: 1.8 V to 5.5 V
  - Temperature range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- 3-wire SPI interface
  - $V_{IH} = 2.4\text{ V}$  for  $2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$
  - $V_{IH} = (V_{DD} - 0.3\text{ V})$  for  $1.8\text{ V} \leq V_{DD} \leq 2.7\text{ V}$
- $\overline{\text{LDAC}}$  pin for simultaneous output update
- Very low power: 0.1 mA/channel at 1.8 V
- Low-power start-up mode: Outputs powered down with 10 k $\Omega$  to  $A_{GND}$ .
- Tiny package
  - 16-pin WQFN (3 mm × 3 mm)

## 2 Applications

- [Multifunction printer](#)
- [Display panel for TV](#)
- [OLED TV](#)
- [Virtual reality headset](#)
- [Currency counter](#)
- [Automatic teller machine \(ATM\)](#)

## 3 Description

The 10-bit DAC53508 and 8-bit DAC43508 (DACx3508) are low-power, eight-channel, voltage-output, digital-to-analog converters (DACs). The DACx3508 are specified monotonic by design across a wide power supply range from 1.8 V to 5.5 V. Using an external reference, the DACx3508 provides a full-scale output voltage range of 1.8 V to 5.5 V while consuming 0.1-mA quiescent current per channel. The DACx3508 also includes per channel, user programmable, power down registers. These registers facilitate the DAC output buffers to start in a 10 k $\Omega$ - $A_{GND}$  power-down state, and remain in this state until a power-up command is issued to these output buffers.


Low quiescent current, wide power-supply range, octal channel, and a per-channel power-down option make the DACx3508 an excellent choice for high-density, low-power, battery-operated systems.

The devices communicate through the 3-wire (write-only) SPI interface. These devices also have a load DAC ( $\overline{\text{LDAC}}$ ) and clear  $\overline{\text{CLR}}$  inputs.

### Device Information

PART NUMBER	PACKAGE <sup>(1)</sup>	BODY SIZE (NOM)
DAC53508	WQFN (16)	3.00 mm × 3.00 mm
DAC43508		

(1) For all available packages, see the orderable addendum at the end of the data sheet.

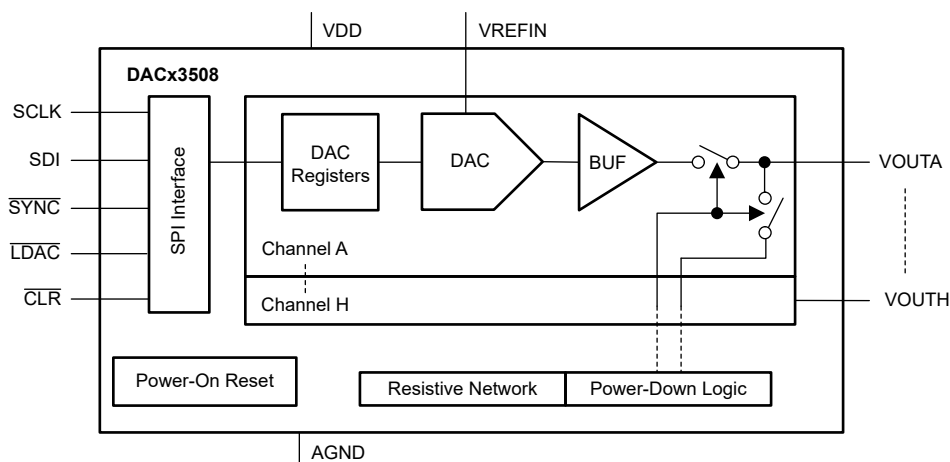

**Block Diagram**



## Table of Contents

<b>1 Features</b> .....	1	8.3 Feature Description.....	19
<b>2 Applications</b> .....	1	8.4 Device Functional Modes.....	21
<b>3 Description</b> .....	1	8.5 Programming.....	21
<b>4 Revision History</b> .....	2	8.6 Register Map.....	22
<b>5 Device Comparison Table</b> .....	3	<b>9 Application and Implementation</b> .....	25
<b>6 Pin Configurations and Functions</b> .....	3	9.1 Application Information.....	25
<b>7 Specifications</b> .....	4	9.2 Typical Applications.....	25
7.1 Absolute Maximum Ratings.....	4	<b>10 Power Supply Recommendations</b> .....	29
7.2 ESD Ratings.....	4	<b>11 Layout</b> .....	29
7.3 Recommended Operating Conditions.....	4	11.1 Layout Guidelines.....	29
7.4 Thermal Information.....	4	11.2 Layout Example.....	29
7.5 Electrical Characteristics.....	5	<b>12 Device and Documentation Support</b> .....	30
7.6 Timing Requirements: SPI.....	7	12.1 Documentation Support.....	30
7.7 Timing Requirements: Logic.....	7	12.2 Receiving Notification of Documentation Updates..	30
7.8 Timing Diagrams .....	7	12.3 Support Resources.....	30
7.9 Typical Characteristics: Static Performance.....	8	12.4 Trademarks.....	30
7.10 Typical Characteristics: Dynamic Performance.....	14	12.5 Electrostatic Discharge Caution.....	30
7.11 Typical Characteristics: General.....	16	12.6 Glossary.....	30
<b>8 Detailed Description</b> .....	18	<b>13 Mechanical, Packaging, and Orderable Information</b> .....	30
8.1 Overview.....	18		
8.2 Functional Block Diagram.....	18		


## 4 Revision History

DATE	REVISION	NOTES
December 2021	*	Initial Release

## 5 Device Comparison Table

DEVICE	RESOLUTION
DAC53508	10-Bit
DAC43508	8-Bit

## 6 Pin Configurations and Functions

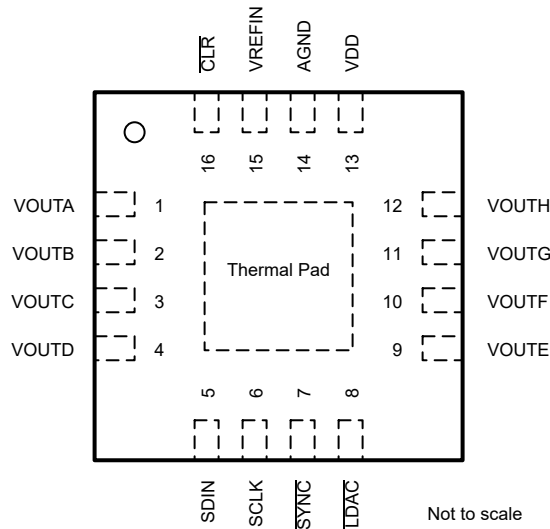

**Figure 6-1. RTE (16-Pin WQFN) Package, Top View**

**Table 6-1. Pin Functions**

PIN NO.	PIN NAME	TYPE	DESCRIPTION
1	VOUTA	Output	Analog voltage output from DAC channel A.
2	VOUTB	Output	Analog voltage output from DAC channel B.
3	VOUTC	Output	Analog voltage output from DAC channel C.
4	VOUTD	Output	Analog voltage output from DAC channel D.
5	SDIN	Input	SPI data input.
6	SCLK	Input	SPI clock input.
7	$\overline{\text{SYNC}}$	Input	SPI chip select input (active low).
8	$\overline{\text{LDAC}}$	Input	Load DAC (active low) input for synchronous output update, simultaneous output update, or both.
9	VOUE	Output	Analog voltage output from DAC channel E.
10	VOUTF	Output	Analog voltage output from DAC channel F.
11	VOUTG	Output	Analog voltage output from DAC channel G.
12	VOUTH	Output	Analog voltage output from DAC channel H.
13	VDD	Power	Power supply input (1.8 V to 5.5 V).
14	AGND	Ground	Ground reference for all circuitry on the device.
15	VREFIN	Power	External reference input. To use VDD as the reference, connect this pin to VDD.
16	$\overline{\text{CLR}}$	Input	Asynchronous output clear input (active low).
—	Thermal Pad	Ground	Connect thermal pad to AGND.

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
V <sub>DD</sub>	Power-supply voltage to A <sub>GND</sub>	-0.3	6	V
V <sub>REFIN</sub>	External reference voltage to A <sub>GND</sub>	-0.3	V <sub>DD</sub> + 0.3	V
	Digital input(s) to A <sub>GND</sub>	-0.3	V <sub>DD</sub> + 0.3	V
V <sub>OUT</sub>	Voltage output to A <sub>GND</sub>	-0.3	V <sub>DD</sub> + 0.3	V
	Current into any pin	-10	10	mA
T <sub>J</sub>	Junction temperature, T <sub>J</sub>	-40	150	°C
T <sub>stg</sub>	Storage temperature, T <sub>stg</sub>	-65	150	°C

- (1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

### 7.2 ESD Ratings

			VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	±1000	V
		Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002, all pins <sup>(2)</sup>	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.  
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V <sub>DD</sub> to A <sub>GND</sub>	Positive supply voltage to ground	1.8		5.5	V
V <sub>REFIN</sub> to A <sub>GND</sub>	Reference input supply voltage to ground	1.8		V <sub>DD</sub>	V
V <sub>IH</sub>	Digital input high voltage, 1.8 V ≤ V <sub>DD</sub> ≤ 2.7 V	V <sub>DD</sub> - 0.3			V
	Digital input high voltage, 2.7 V < V <sub>DD</sub> ≤ 5.5 V	2.4			
V <sub>IL</sub>	Digital input low voltage			0.5	V
T <sub>A</sub>	Ambient temperature	-40		125	°C

### 7.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		DACx3508		UNIT
		RTE (WQFN)		
		16 PIN		
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	49		°C/W
R <sub>θJC(top)</sub>	Junction-to-case (top) thermal resistance	50		°C/W
R <sub>θJB</sub>	Junction-to-board thermal resistance	24.1		°C/W
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	1.1		°C/W
Y <sub>JB</sub>	Junction-to-board characterization parameter	24.1		°C/W
R <sub>θJC(bot)</sub>	Junction-to-case (bottom) thermal resistance	8.7		°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

## 7.5 Electrical Characteristics

all minimum/maximum specifications at  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$  and all typical specification at  $T_A = 25^\circ\text{C}$ ,  $1.8\text{ V} \leq V_{DD} \leq 5.5\text{ V}$ ,  $V_{REFIN} = 2.5\text{ V}$  for  $V_{DD} \geq 2.7\text{ V}$ ,  $V_{REFIN} = 1.8\text{ V}$  for  $V_{DD} \leq 2.7\text{ V}$ ,  $R_L = 5\text{ k}\Omega$  to  $A_{GND}$ ,  $C_L = 200\text{ pF}$  to  $A_{GND}$ , and digital inputs at  $V_{DD}$  or  $A_{GND}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>STATIC PERFORMANCE</b>						
	Resolution	DAC53508	10			Bits
		DAC43508	8			
INL	Integral nonlinearity <sup>(1)</sup>		-1		1	LSB
DNL	Differential nonlinearity <sup>(1)</sup>		-1		1	LSB
	Zero-code error	Code 0d into DAC		6	12	mV
	Zero-code-error temperature coefficient	Code 0d into DAC		±5		$\mu\text{V}/^\circ\text{C}$
	Offset error <sup>(1)</sup>		-0.5	0.25	0.5	%FSR
	Offset-error temperature coefficient <sup>(1)</sup>			±0.0003		%FSR/ $^\circ\text{C}$
	Gain error <sup>(1)</sup>		-0.5	0.25	0.5	%FSR
	Gain-error temperature coefficient <sup>(1)</sup>			±0.0004		%FSR/ $^\circ\text{C}$
	Full-scale error <sup>(4)</sup>	$2.7\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	-0.5	0.25	0.5	%FSR
		$1.8\text{ V} \leq V_{DD} \leq 2.7\text{ V}$	-1	0.5	1	
	Full-scale-error temperature coefficient <sup>(4)</sup>			±0.0004		%FSR/ $^\circ\text{C}$
<b>OUTPUT</b>						
$V_{OUTX}$	Output voltage		0		5.5	V
$C_L$	Capacitive load <sup>(2)</sup>	$R_L = \text{Infinite}$			1	nF
					2	
	Load regulation	DAC at midscale, $-10\text{ mA} \leq I_{OUT} \leq +10\text{ mA}$ , $V_{DD} = 5.5\text{ V}$		0.1		mV/mA
	Short-circuit current <sup>(3)</sup>	$V_{DD} = 1.8\text{ V}$		10		mA
		$V_{DD} = 2.7\text{ V}$		25		
		$V_{DD} = 5.5\text{ V}$		50		
	Output voltage headroom	To $V_{DD}$ , DAC output unloaded		0.05		V
	Output voltage headroom <sup>(2)</sup>	To $V_{DD}$ , load current = 10 mA at $V_{DD} = 5.5\text{ V}$ , load current = 3 mA at $V_{DD} = 2.7\text{ V}$ , load current = 1 mA at $V_{DD} = 1.8\text{ V}$ , DAC code at full-scale	10			%FSR
$Z_O$	DC output impedance	DAC at midscale		0.25		$\Omega$
		DAC at code 4d		0.25		
		DAC at code 1016d		0.26		
DC PSRR	Power supply rejection ratio (dc)	DAC at midscale, $V_{DD} = 5\text{ V} \pm 10\%$		0.25		mV/V

## 7.5 Electrical Characteristics (continued)

all minimum/maximum specifications at  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$  and all typical specification at  $T_A = 25^\circ\text{C}$ ,  $1.8\text{ V} \leq V_{DD} \leq 5.5\text{ V}$ ,  $V_{REFIN} = 2.5\text{ V}$  for  $V_{DD} \geq 2.7\text{ V}$ ,  $V_{REFIN} = 1.8\text{ V}$  for  $V_{DD} \leq 2.7\text{ V}$ ,  $R_L = 5\text{ k}\Omega$  to  $A_{GND}$ ,  $C_L = 200\text{ pF}$  to  $A_{GND}$ , and digital inputs at  $V_{DD}$  or  $A_{GND}$  (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>DYNAMIC PERFORMANCE</b>						
$t_{\text{sett}}$	Output voltage settling time	1/4 to 3/4 scale and 3/4 to 1/4 scale settling to 10%FSR, $V_{DD} = 5.5\text{ V}$		10		$\mu\text{s}$
SR	Slew rate	$V_{DD} = 5.5\text{ V}$		0.6		$\text{V}/\mu\text{s}$
	Power-on glitch magnitude			110		mV
$V_n$	Output noise	$f = 0.1\text{ Hz}$ to $10\text{ Hz}$ , DAC at midscale, $V_{DD} = 5.5\text{ V}$		40		$\mu\text{V}_{pp}$
$V_n$	Output noise	$f = 0.1\text{ Hz}$ to $100\text{ kHz}$ , DAC at midscale, $V_{DD} = 5.5\text{ V}$		0.05		$\text{mV}_{rms}$
$V_n$	Output noise density	$f = 1\text{ kHz}$ , DAC at midscale, $V_{DD} = 5.5\text{ V}$		0.2		$\mu\text{V}/\sqrt{\text{Hz}}$
		$f = 10\text{ kHz}$ , DAC at midscale, $V_{DD} = 5.5\text{ V}$		0.2		
AC PSRR	Power-supply rejection ratio (ac)	200-mV, 50-Hz or 60-Hz sine wave superimposed on power-supply voltage, DAC at midscale		-71		dB
	Channel-to-channel ac crosstalk	Full-scale swing on adjacent channel		1.5		nV-s
	Channel-to-channel dc crosstalk	Full-scale swing on all channels, measured channel at zero-scale or full-scale		0.05		LSB
	Code change glitch impulse	$\pm 1$ -LSB change around midscale (including feedthrough)		10		nV-s
	Code change glitch impulse magnitude	$\pm 1$ -LSB change around midscale (including feedthrough)		25		mV
<b>VOLTAGE REFERENCE INPUT</b>						
	Reference input impedance	All channels powered on		12.5		k $\Omega$
	Reference input capacitance			50		pF
<b>DIGITAL INPUTS</b>						
	Digital feedthrough	SCLK = 1 MHz, DAC output static at midscale		20		nV-s
	Pin capacitance	Per pin		10		pF
<b>POWER</b>						
$I_{DD}$	Current flowing into $V_{DD}$	Normal mode, all DACs at full-scale, SPI static		3	5	mA
		All DAC channels powered down		50		$\mu\text{A}$

- (1) End point fit between codes: code 4d to code 1016d for 10 bit, code 1d to code 251d for 8 bit.
- (2) Characterized by design. Not production tested.
- (3) Full-scale output shorted per channel to  $A_{GND}$  or zero-scale output shorted to  $V_{DD}$ .
- (4) Code 1023d into DAC, no headroom.

### 7.6 Timing Requirements: SPI

All inputs signals are specified with  $t_R = t_F = 1 \text{ V/ns}$  (10% to 90% of  $V_{DD}$ ) and timed from a voltage level of  $V_{DD}/2$ ,  $1.8 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$  and  $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$


		MIN	NOM	MAX	UNIT
$f_{(SCLK)}$	Serial clock frequency, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$			25	MHz
	Serial clock frequency, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$			50	
$t_{SCLKHIGH}$	SCLK high time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	20			ns
	SCLK high time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	10			
$t_{SCLKLOW}$	SCLK low time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	20			ns
	SCLK low time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	10			
$t_{SDIS}$	SDI setup time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	16			ns
	SDI setup time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	8			
$t_{SDIH}$	SDI hold time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	10			ns
	SDI hold time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	5			
$t_{CSS}$	$\overline{SYNC}$ to SCLK falling edge setup time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	36			ns
	$\overline{SYNC}$ to SCLK falling edge setup time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	18			
$t_{CSH}$	SCLK falling edge to $\overline{SYNC}$ rising edge, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	10			ns
	SCLK falling edge to $\overline{SYNC}$ rising edge, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	5			
$t_{CSHIGH}$	$\overline{SYNC}$ high time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	50			ns
	$\overline{SYNC}$ high time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	25			

### 7.7 Timing Requirements: Logic

all input signals are timed from VIL to 70% of  $V_{DD}$ ,  $1.8 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$ ,  $1.8 \text{ V} \leq V_{REFIN} \leq V_{DD}$ ,  $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ ,  $V_{pullup} = V_{DD}$  for  $1.8 \text{ V} \leq V_{DD} \leq 2.7 \text{ V}$ ,  $V_{pullup} = 2.7 \text{ V}$  or  $V_{DD}$  for  $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$

		MIN	NOM	MAX	UNIT
$t_{CS2LDAC}$	$\overline{SYNC}$ rise edge to $\overline{LDAC}$ fall edge, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	100			ns
	$\overline{SYNC}$ rise edge to $\overline{LDAC}$ fall edge, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	50			
$t_{LDACW}$	$\overline{LDAC}$ low time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	60			ns
	$\overline{LDAC}$ low time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	30			
$t_{CLR W}$	$\overline{CLR}$ low time, $1.7 \text{ V} \leq V_{DD} < 2.7 \text{ V}$	60			ns
	$\overline{CLR}$ low time, $2.7 \text{ V} \leq V_{DD} \leq 5.5 \text{ V}$	30			

### 7.8 Timing Diagrams

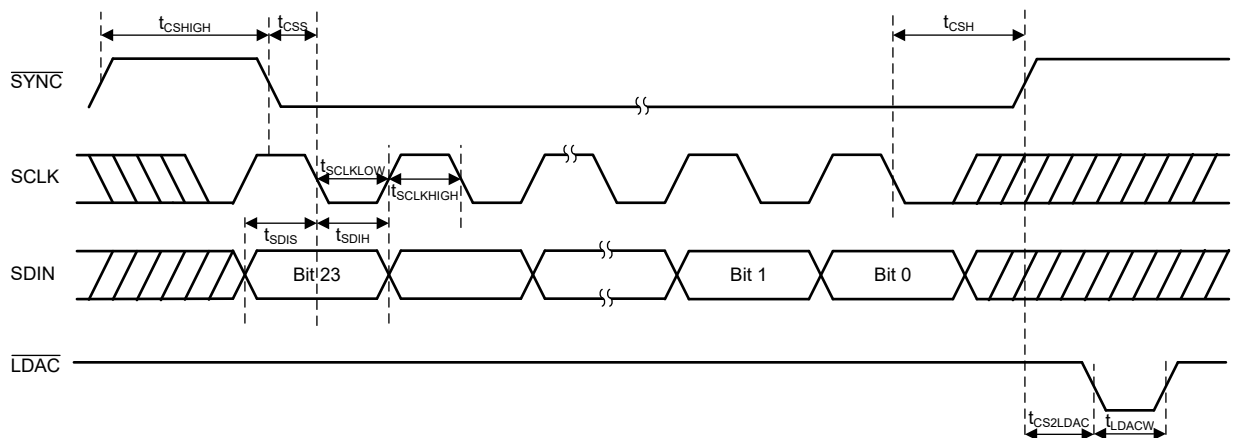

**Figure 7-1. Serial Interface Timing Diagram**

## 7.9 Typical Characteristics: Static Performance

at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

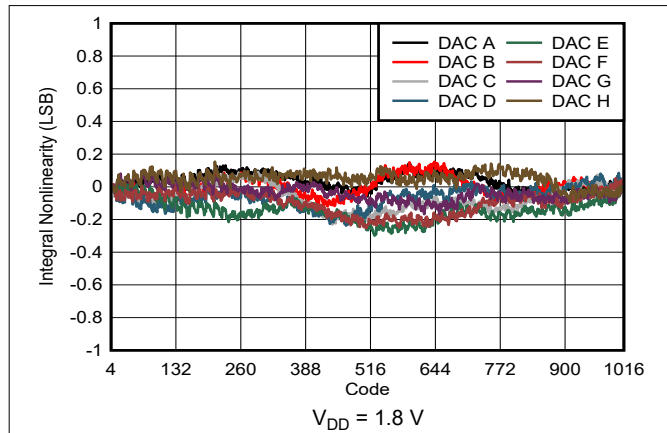


Figure 7-2. Integral Nonlinearity vs Digital Input Code

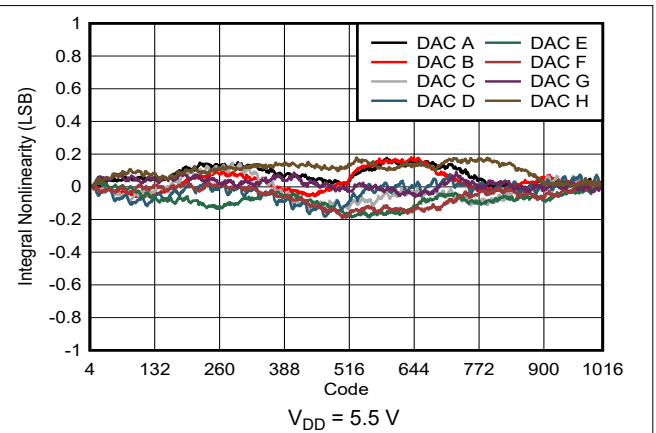


Figure 7-3. Integral Nonlinearity vs Digital Input Code

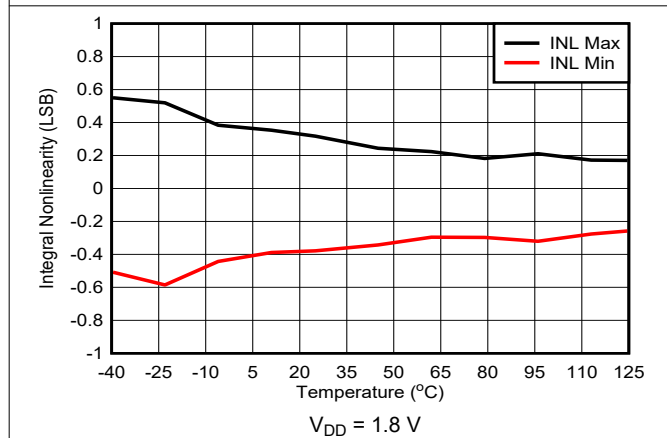


Figure 7-4. Integral Nonlinearity vs Temperature

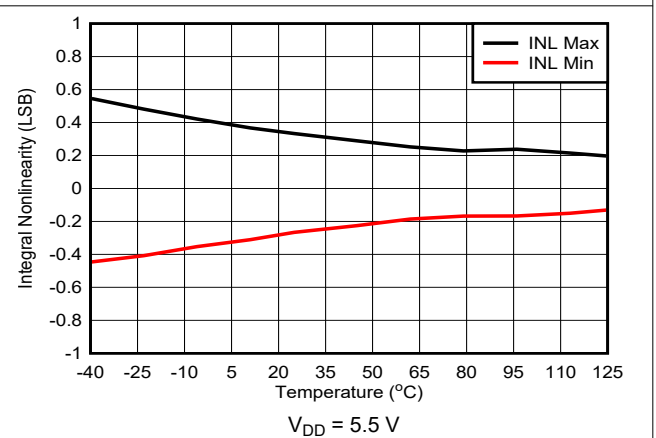


Figure 7-5. Integral Nonlinearity vs Temperature

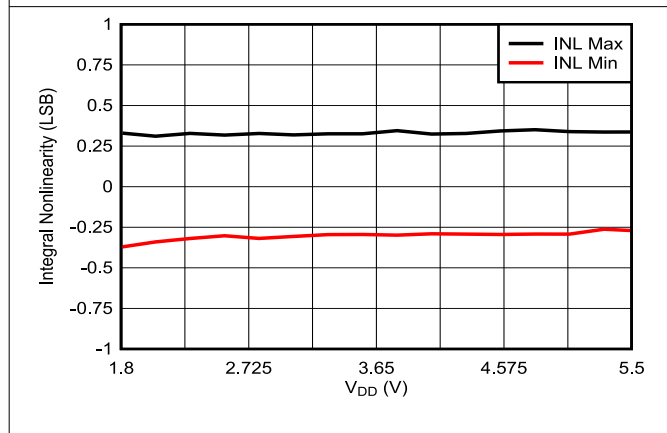


Figure 7-6. Integral Nonlinearity vs Supply Voltage


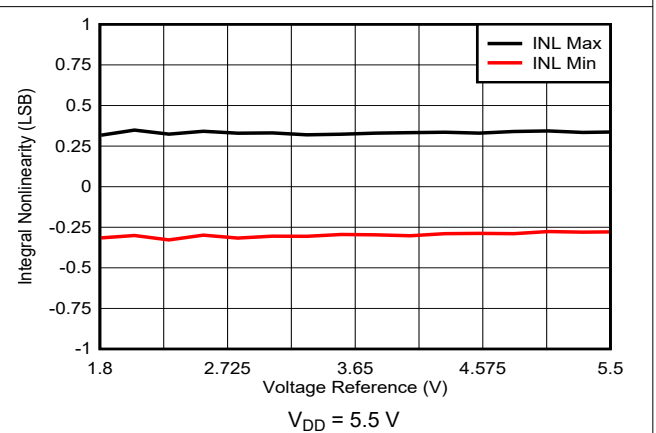


Figure 7-7. Integral Nonlinearity vs Voltage Reference




## 7.9 Typical Characteristics: Static Performance (continued)


at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

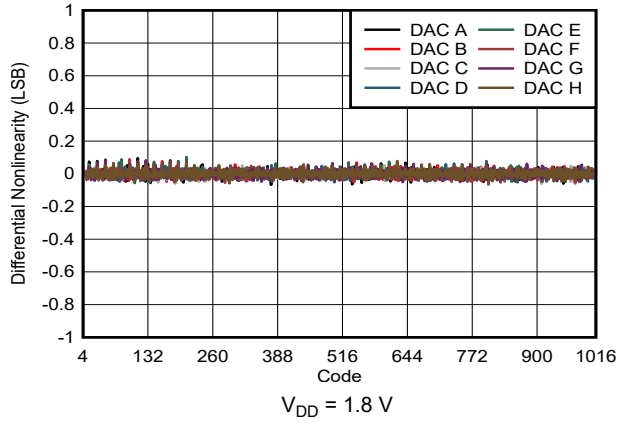


**Figure 7-8. Differential Nonlinearity vs Digital Input Code**

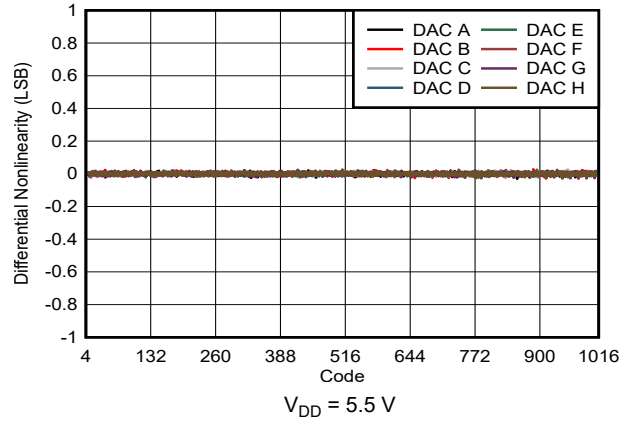


**Figure 7-9. Differential Nonlinearity vs Digital Input Code**

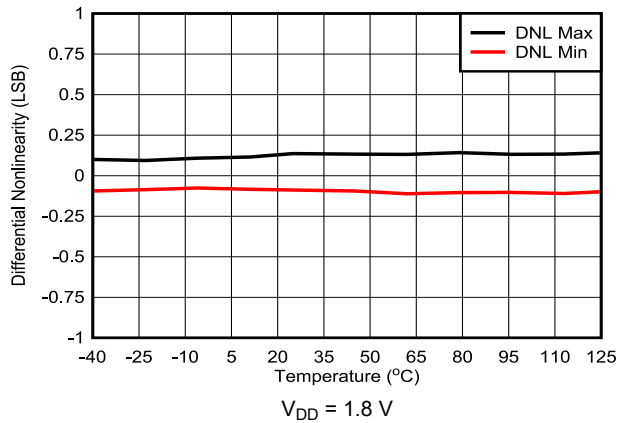


**Figure 7-10. Differential Nonlinearity vs Temperature**

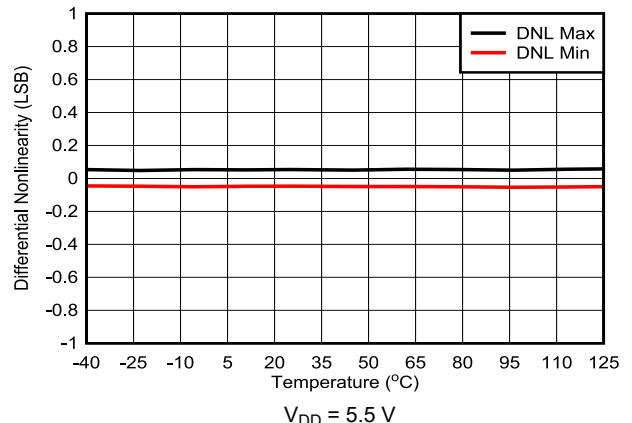

**Figure 7-11. Differential Nonlinearity vs Temperature**

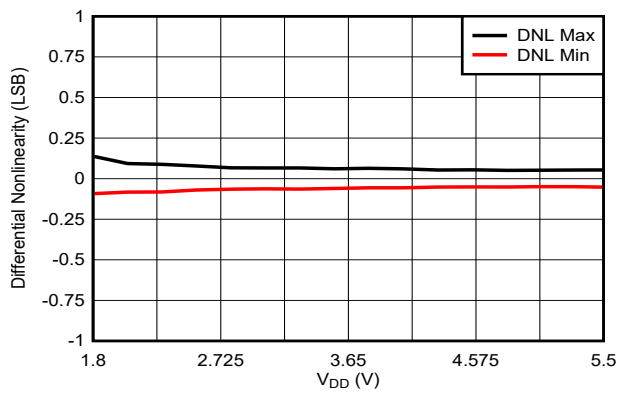

**Figure 7-12. Differential Nonlinearity vs Supply Voltage**

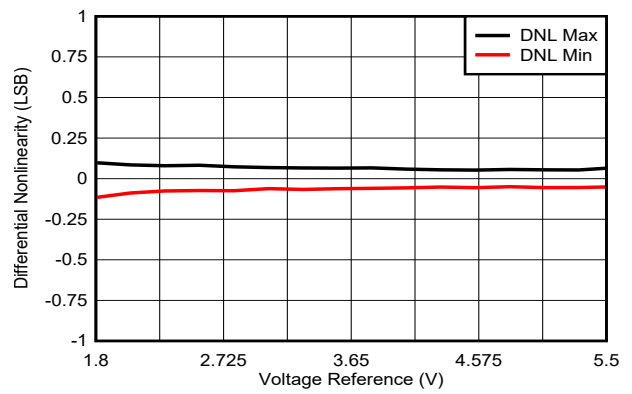

**Figure 7-13. Differential Nonlinearity vs Voltage Reference**

## 7.9 Typical Characteristics: Static Performance (continued)

at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

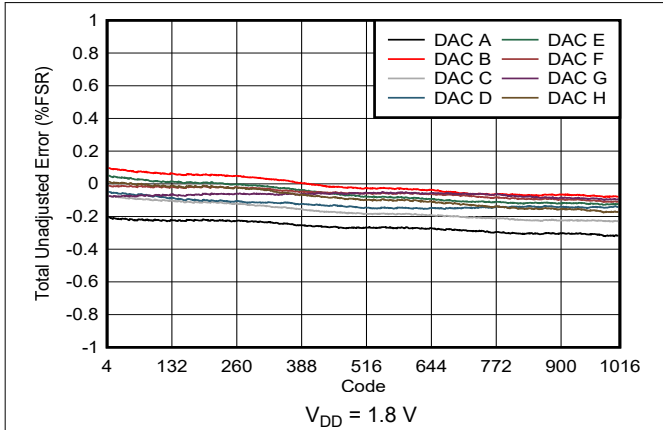


Figure 7-14. Total Unadjusted Error vs Digital Input Code

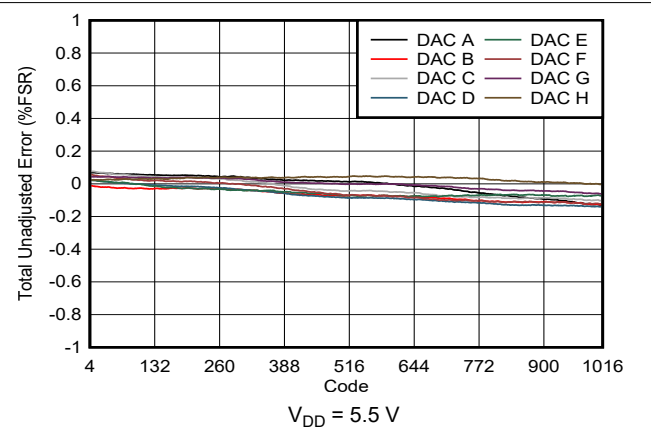


Figure 7-15. Total Unadjusted Error vs Digital Input Code

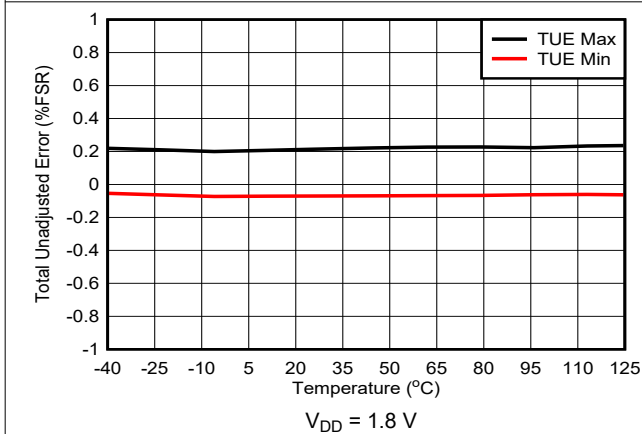


Figure 7-16. Total Unadjusted Error vs Temperature

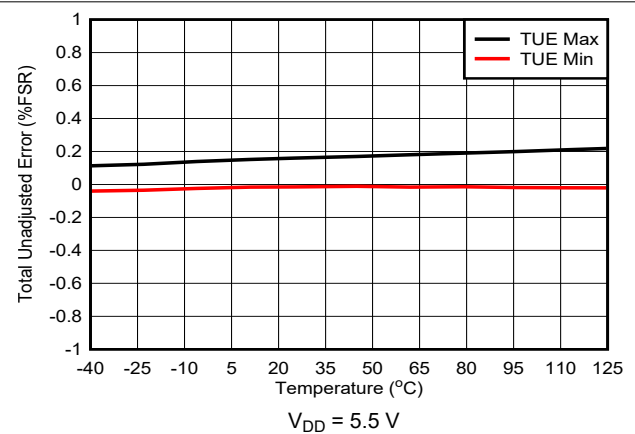


Figure 7-17. Total Unadjusted Error vs Temperature

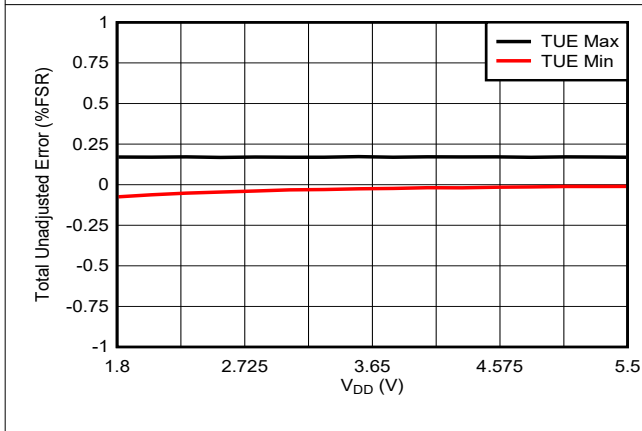


Figure 7-18. Total Unadjusted Error vs Supply Voltage

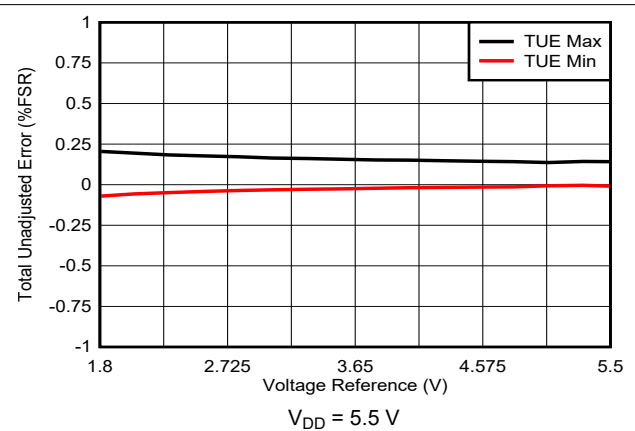


Figure 7-19. Total Unadjusted Error vs Voltage Reference

## 7.9 Typical Characteristics: Static Performance (continued)

at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

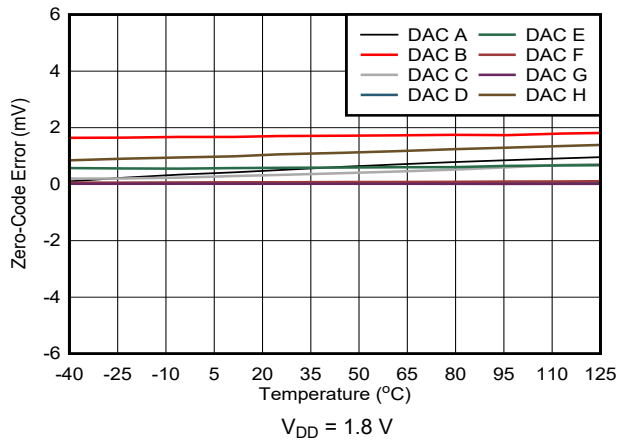


Figure 7-20. Zero-Code Error vs Temperature

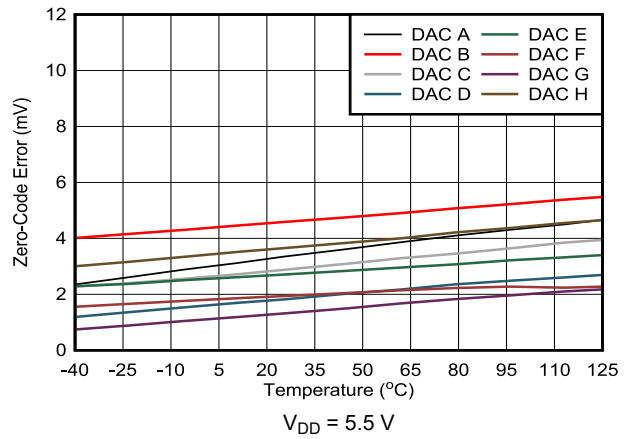


Figure 7-21. Zero-Code Error vs Temperature

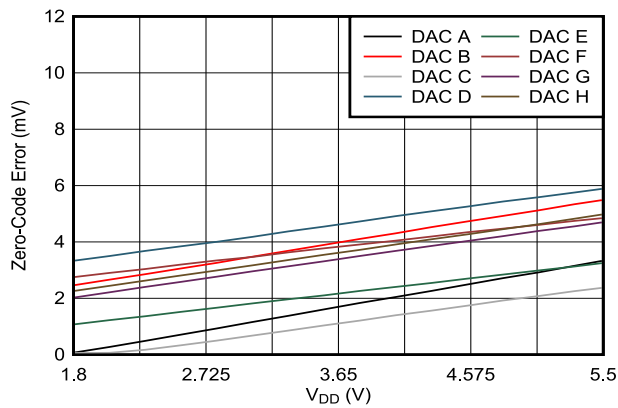


Figure 7-22. Zero-Code Error vs Supply Voltage

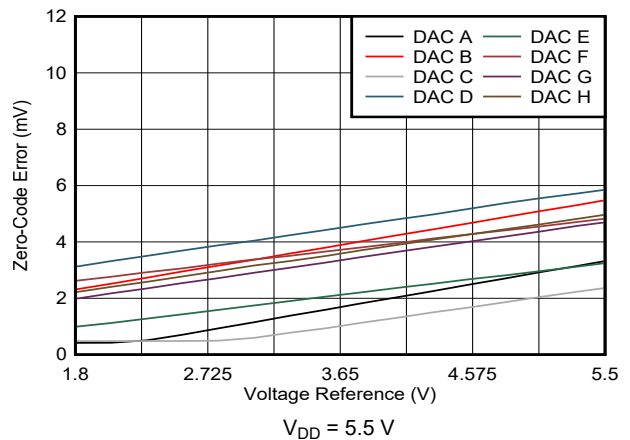


Figure 7-23. Zero-Code Error vs Voltage Reference

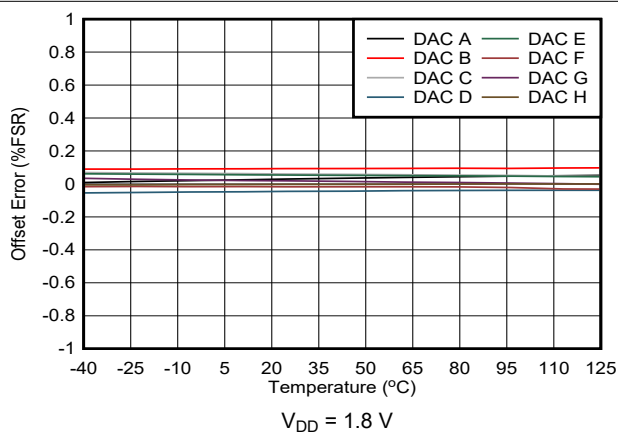


Figure 7-24. Offset Error vs Temperature







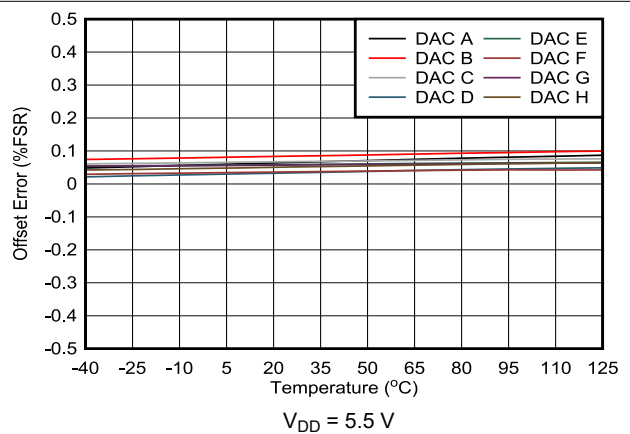


Figure 7-25. Offset Error vs Temperature





## 7.9 Typical Characteristics: Static Performance (continued)

at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

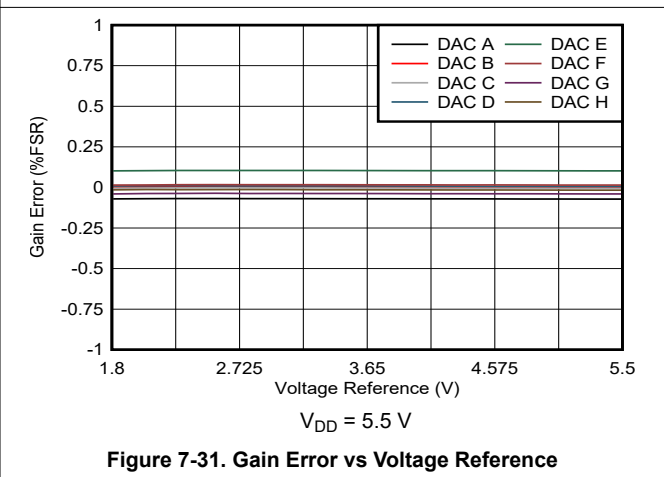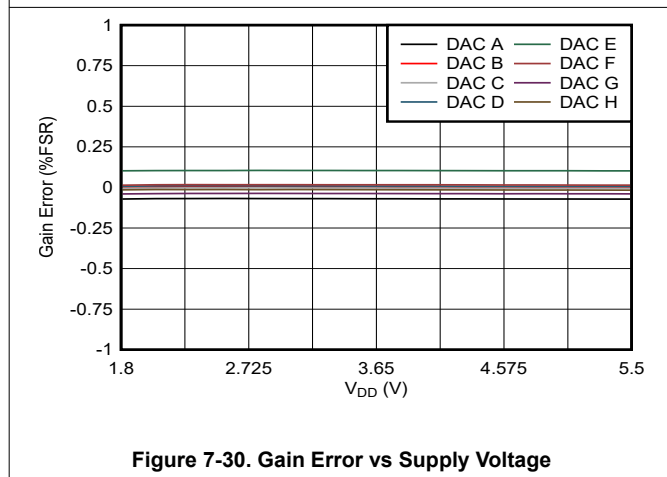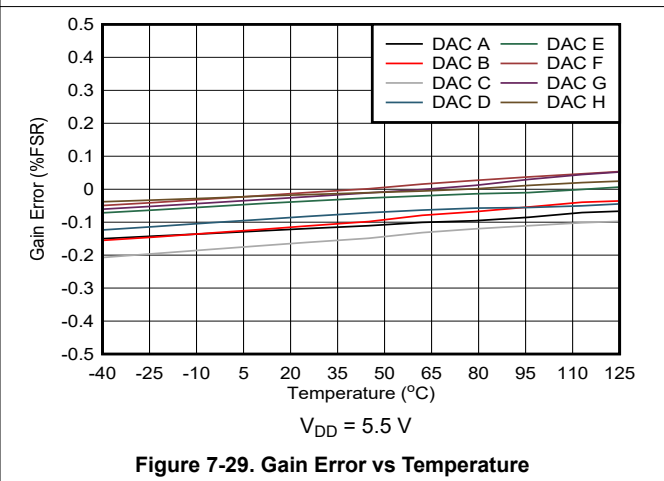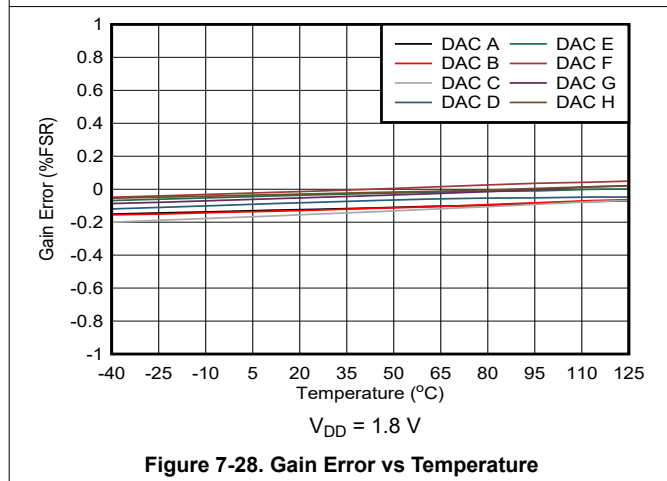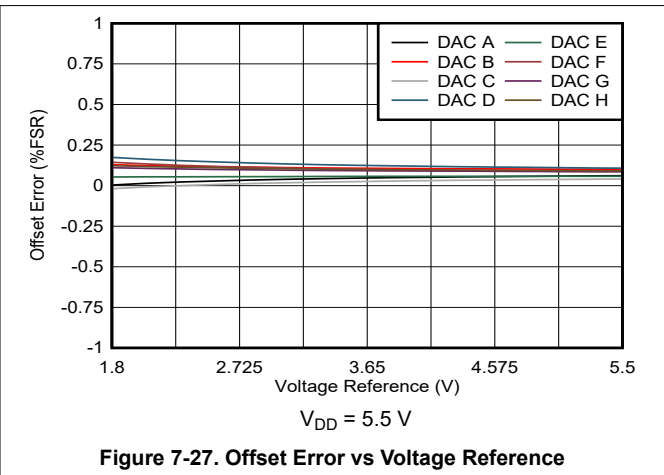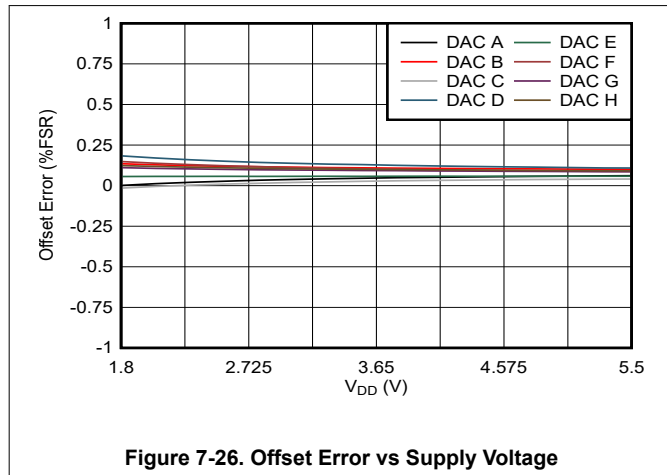


## 7.9 Typical Characteristics: Static Performance (continued)

at  $T_A = 25^\circ\text{C}$ , reference = 1.8 V, and DAC outputs unloaded (unless otherwise noted)

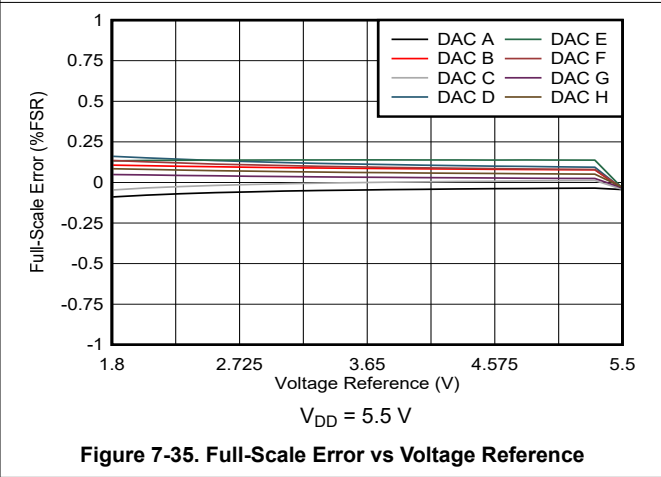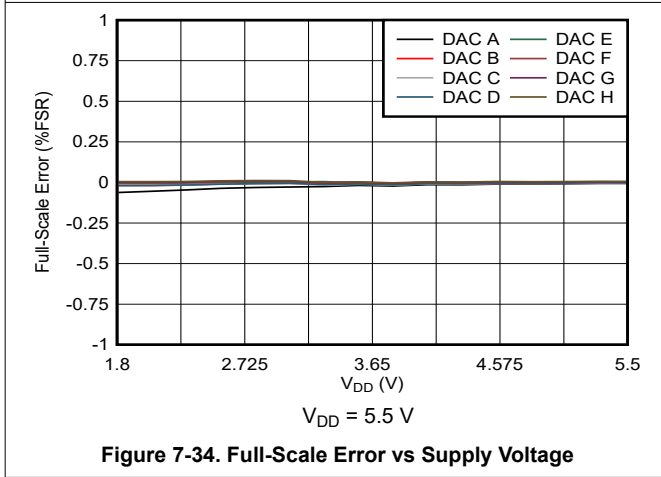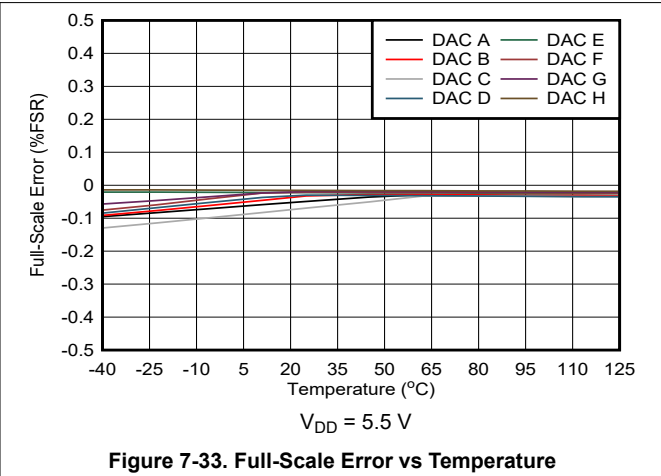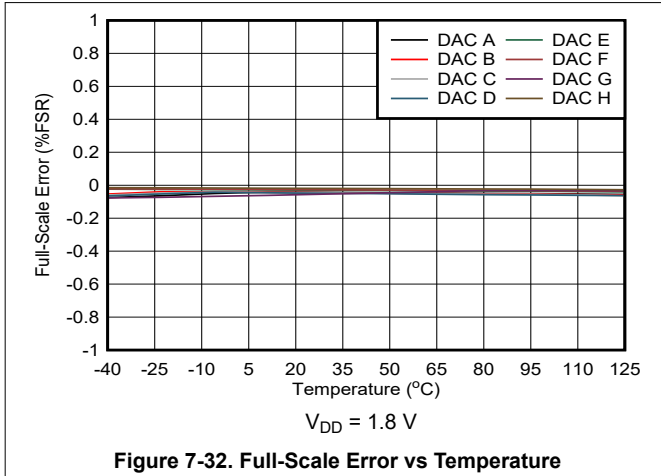

## 7.10 Typical Characteristics: Dynamic Performance


at  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , reference = 5.5 V, and DAC outputs unloaded (unless otherwise noted)

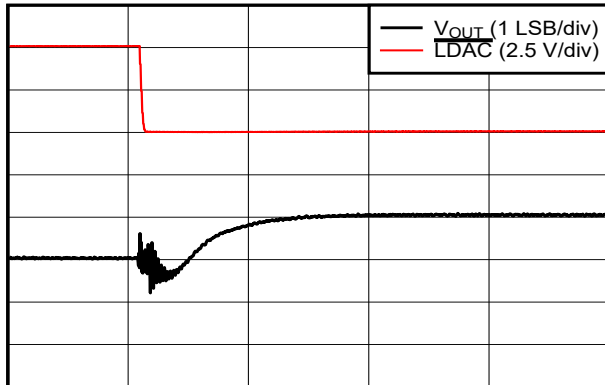

Time (1  $\mu\text{s}/\text{div}$ )

DAC code transition from midscale – 1 to midscale,  
output load: 5 k $\Omega$  || 200 pF


**Figure 7-36. Glitch Impulse, Rising Edge, 1-LSB Step**

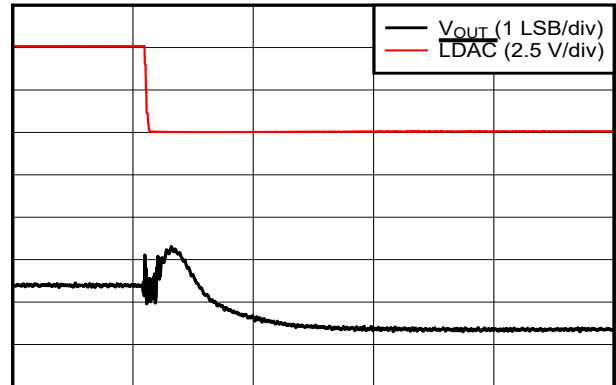

Time (1  $\mu\text{s}/\text{div}$ )

DAC code transition from midscale to midscale – 1 LSB,  
output load: 5 k $\Omega$  || 200 pF


**Figure 7-37. Glitch Impulse, Falling Edge, 1 LSB Step**

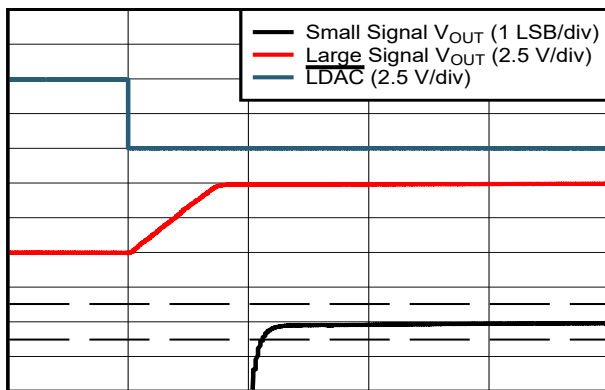

Time (5  $\mu\text{s}/\text{div}$ )

DAC code transition from 102d to 922d, typical  
channel shown, output load: 5 k $\Omega$  || 200 pF


**Figure 7-38. Full-Scale Settling Time, Rising Edge**

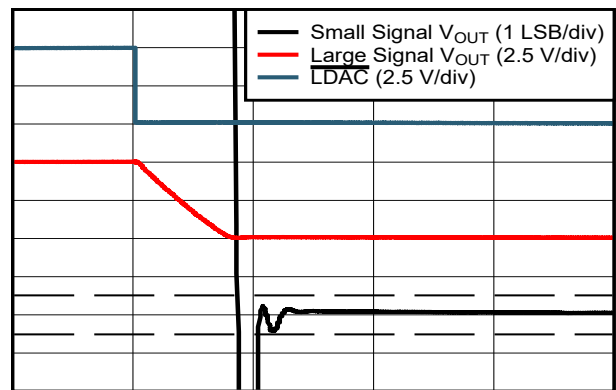

Time (5  $\mu\text{s}/\text{div}$ )


DAC code transition from 922d to 102d, typical  
channel shown, output load: 5 k $\Omega$  || 200 pF

**Figure 7-39. Full-Scale Settling Time, Falling Edge**

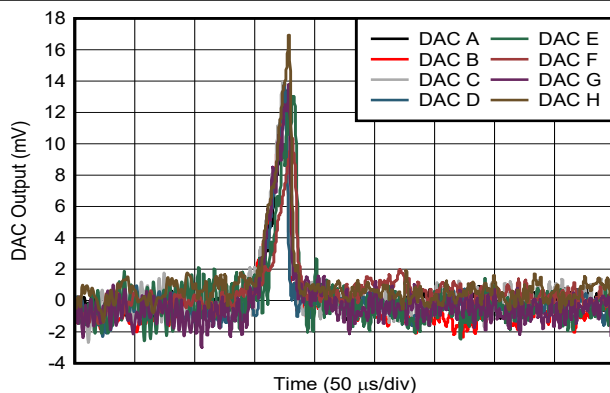

Output load: 5 k $\Omega$  || 200 pF

**Figure 7-40. Power-on Glitch**

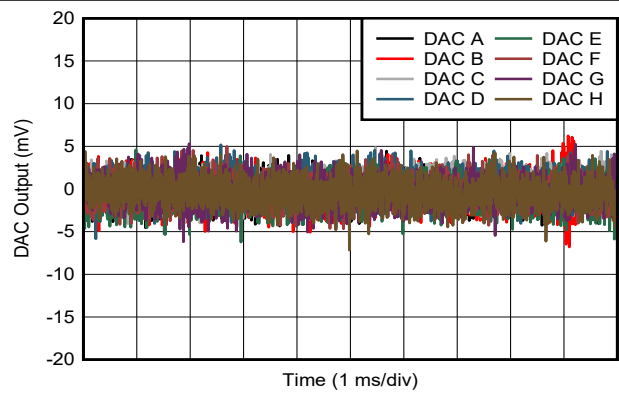


Output load: 5 k $\Omega$  || 200 pF

**Figure 7-41. Power-off Glitch**

## 7.10 Typical Characteristics: Dynamic Performance (continued)


at  $T_A = 25^\circ\text{C}$ ,  $V_{DD} = 5.5\text{ V}$ , reference = 5.5 V, and DAC outputs unloaded (unless otherwise noted)

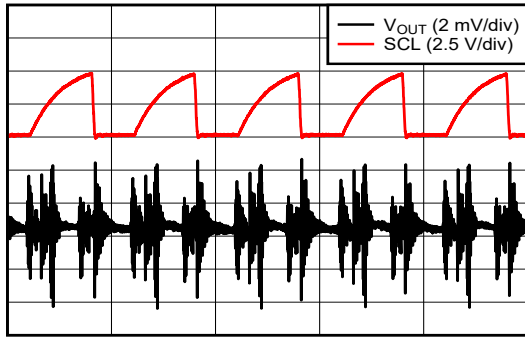

Time (1  $\mu\text{s}/\text{div}$ )


DAC at midscale, reference tied to  $V_{DD}$ ,  
output load: 5 k $\Omega$  || 200 pF, SCLK = 1 MHz

**Figure 7-42. Clock Feedthrough**

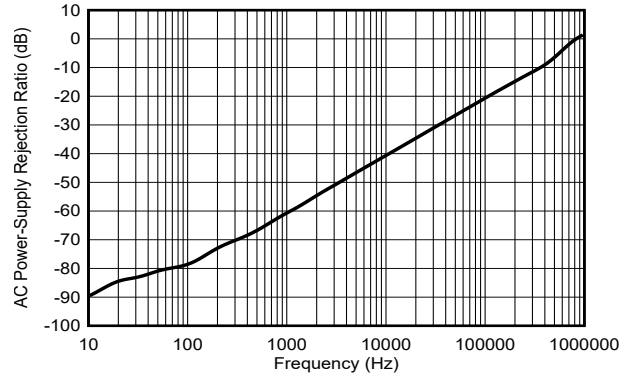

DAC at full-scale, output load: 5 k $\Omega$  || 200 pF,  
 $V_{DD} = 5.25\text{ V} + 0.2\text{ V}_{PP}$ ,  $V_{REFIN} = 4.5\text{ V}$


**Figure 7-43. AC Power-Supply Rejection Ratio vs Frequency**

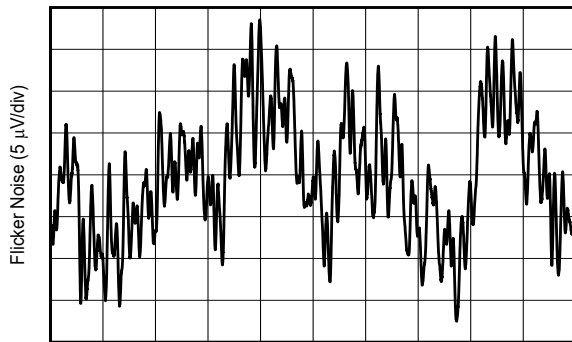

Time (1 s/div)

DAC at midscale,  $f = 0.1\text{ Hz}$  to 10 Hz

**Figure 7-44. Flicker Noise**

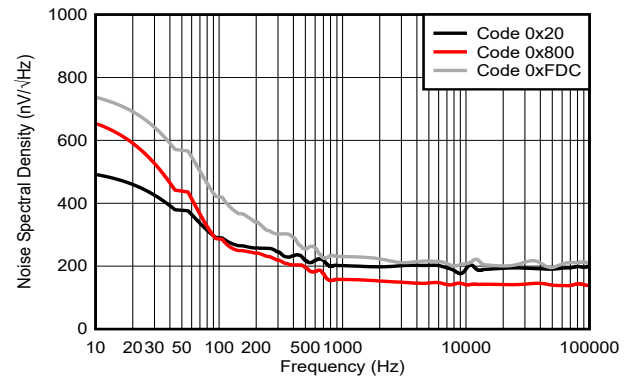

**Figure 7-45. Noise Spectral Density**

## 7.11 Typical Characteristics: General

at  $T_A = 25^\circ\text{C}$ , and DAC outputs unloaded (unless otherwise noted)

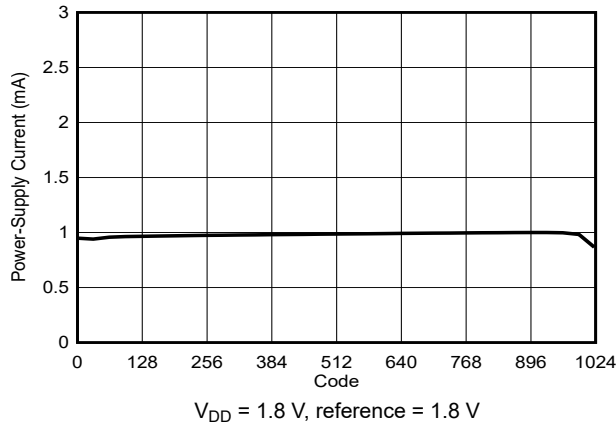


Figure 7-46. Power-Supply Current vs Digital Input Code

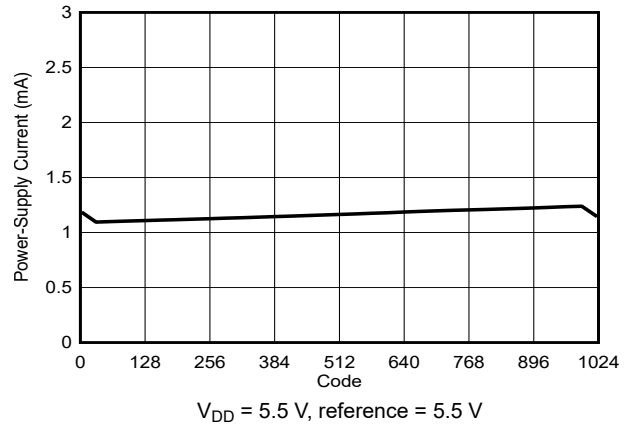


Figure 7-47. Power-Supply Current vs Digital Input Code

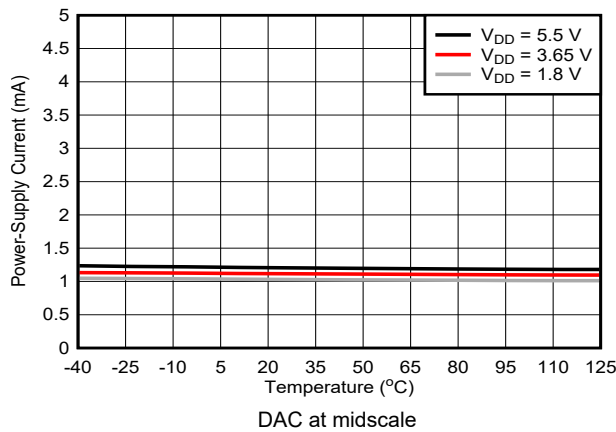


Figure 7-48. Power-Supply Current vs Temperature

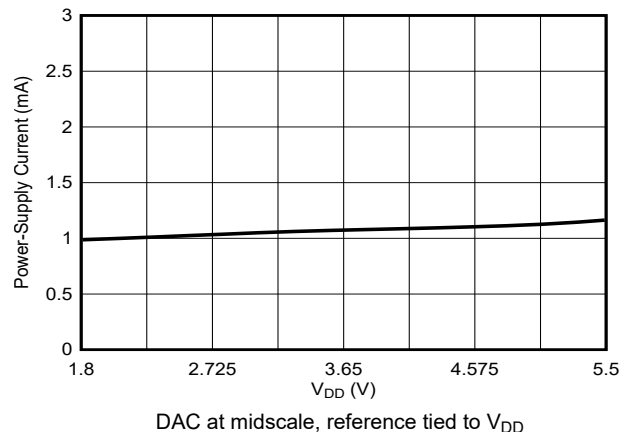


Figure 7-49. Power-Supply Current vs Supply Voltage

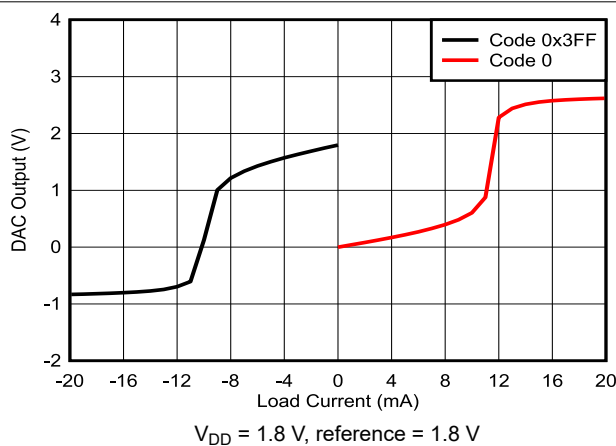


Figure 7-50. Output Source and Sink Capability


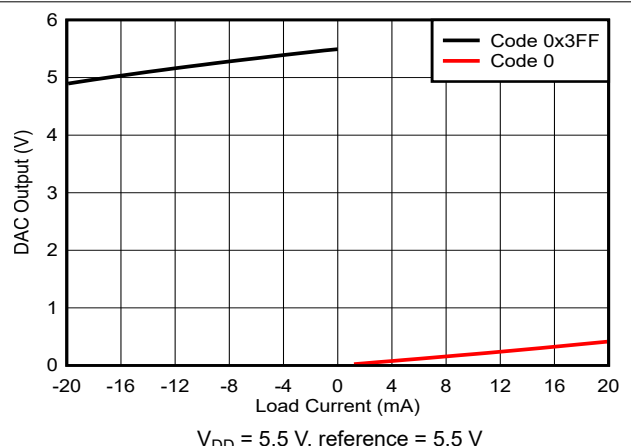


Figure 7-51. Output Source and Sink Capability



### 7.11 Typical Characteristics: General (continued)

at  $T_A = 25^\circ\text{C}$ , and DAC outputs unloaded (unless otherwise noted)

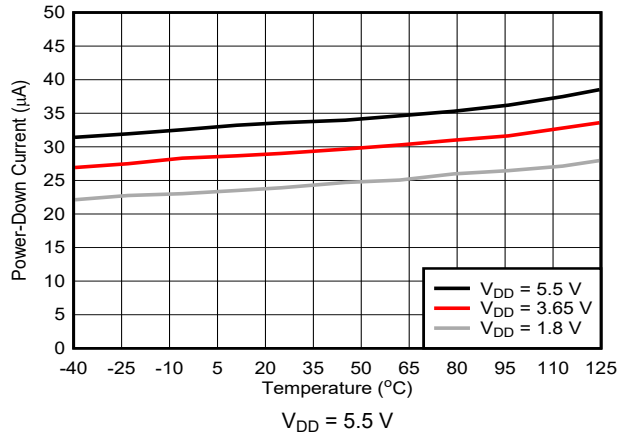

**Figure 7-52. Power-Down Current vs Temperature**

## 8 Detailed Description


### 8.1 Overview

The 10-bit DAC53508 and 8-bit DAC43508 (DACx3508) are a pin-compatible family of eight-channel, buffered voltage-output digital-to-analog converters (DACs). With an external reference ranging from 1.8 V to 5.5 V, a full-scale output voltage of 1.8 V to 5.5 V is achievable. These devices are specified monotonic across the power-supply range.

Communication to the devices is established through a three-wire SPI-compatible interface. These devices do not support readback operation. These devices include a load DAC ( $\overline{\text{LDAC}}$ ) pin for simultaneous DAC updates and a clear ( $\overline{\text{CLR}}$ ) pin for setting the outputs to zero scale.

The DACx3508 devices are characterized for operation over the temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  and are available in tiny QFN packages.


### 8.2 Functional Block Diagram

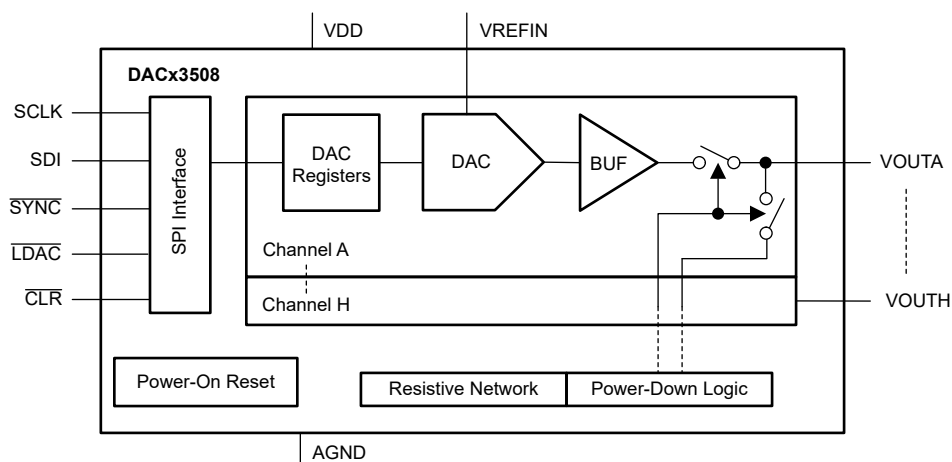

## 8.3 Feature Description

### 8.3.1 Digital-to-Analog Converter (DAC) Architecture

Each output channel in the DACx3508 family of devices consists of string architecture with an output buffer amplifier. Figure 8-1 shows a block diagram of the DAC architecture.

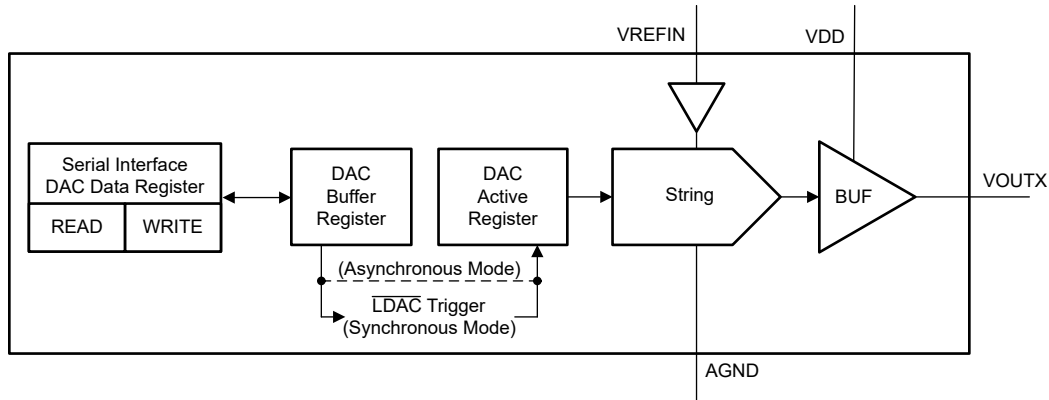

**Figure 8-1. DACx3508 DAC Architecture**

#### 8.3.1.1 DAC Transfer Function

The device writes the input data to the individual DAC Data registers in straight binary format. After a power-on or a reset event, the device sets all DAC registers to zero-code. Equation 1 shows DAC transfer function.

$$V_{OUTX} = \frac{DACn\_DATA}{2^N} \times V_{REFIN} \quad (1)$$

where:

- N = resolution in bits: 10 (DAC53508) or 8 (DAC43508)
- DACn\_DATA is the decimal equivalent of the binary code that is loaded to the DAC register
- DACn\_DATA ranges from 0 to  $2^N - 1$
- $V_{REFIN}$  is the DAC reference voltage

#### 8.3.1.2 DAC Register Update and $\overline{LDAC}$ Functionality

The device stores the data written to the DAC Data registers in the DAC buffer registers. Transfer of data from the DAC buffer registers to the DAC active registers can be set to happen immediately (asynchronous mode) or initiated by an  $\overline{LDAC}$  trigger (synchronous mode). After the DAC active registers are updated, the DAC outputs change to the new values.

The update mode for each DAC channel is determined by the status of  $\overline{LDAC}$  pin.

In asynchronous mode ( $\overline{LDAC}$  = low before the DAC write command), a write to the DAC data register results in an immediate update of the DAC active register and DAC output at the end of SPI frame.

In synchronous mode ( $\overline{LDAC}$  = high before the DAC write command), writing to the DAC data register does not automatically update the DAC output. Instead, the update occurs only after  $\overline{LDAC}$  is pulled low. The synchronous update mode enables simultaneous update of all DAC outputs.

#### 8.3.1.3 $\overline{CLR}$ Functionality

The  $\overline{CLR}$  pin is an asynchronous input pin to the DAC. When this pin is pulled low, the DAC buffers and the DAC active registers are set to zero code.

### 8.3.1.4 Output Amplifier

The output buffer amplifier generates rail-to-rail voltages on the output, giving a maximum output range of 0 V to  $V_{DD}$ . Equation 1 shows that the full-scale output range of the DAC output is determined by the voltage on the VREFIN pin

### 8.3.2 Reference

The DACx3508 require an external reference to operate. However, the reference pin, VREFIN, and the supply pin, VDD, can be tied together. The reference input pin voltage ranges from 1.8 V to  $V_{DD}$ . The typical input impedance of this pin when all the channels are powered on is 12.5 kΩ.

### 8.3.3 Power-On Reset (POR)

The DACx3508 family of devices includes a power-on reset (POR) function that controls the output voltage at power up. After the  $V_{DD}$  supply has been established, a POR event is issued. The POR causes all registers to initialize to default values, and communication with the device is valid only after a 5-ms delay, when  $V_{DD}$  reaches DAC operating range. The default value for the DAC data registers is zero-code. The DAC output remains at the power-up voltage until a valid command is written to a channel.

When the device powers up, a POR circuit sets the device to the default mode. The POR circuit requires specific  $V_{DD}$  levels, as indicated in Figure 8-2, to make sure that the internal capacitors discharge and reset the device on power up. To make sure that a POR occurs,  $V_{DD}$  must be less than 0.7 V for at least 1 ms. When  $V_{DD}$  drops to less than 1.7 V but remains greater than 0.7 V (shown as the undefined region), the device may or may not reset under all specified temperature and power-supply conditions. In this case, initiate a POR. When  $V_{DD}$  remains greater than 1.7 V, a POR does not occur.

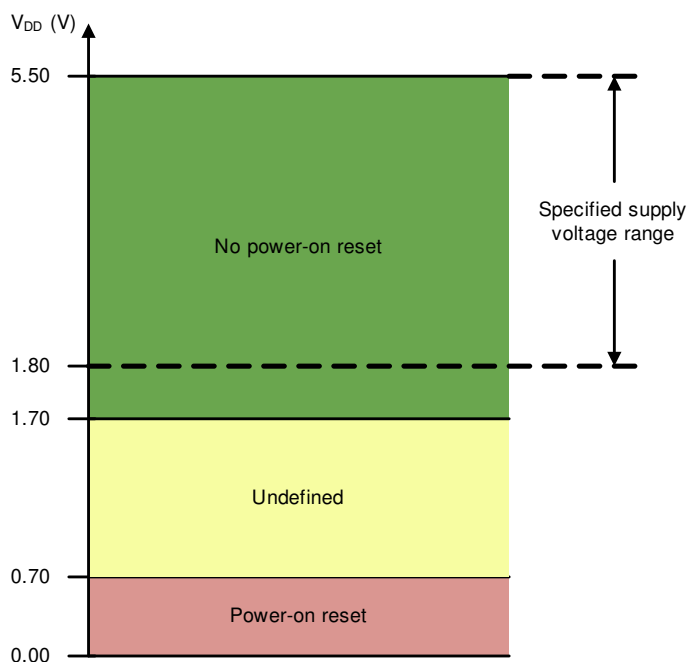


Figure 8-2. Threshold Levels for  $V_{DD}$  POR Circuit

### 8.3.4 Software Reset

A device software reset event is initiated by writing the reserved code 0x1010 to the SW\_RST bit in the STATUS\_TRIGGER register.

## 8.4 Device Functional Modes

The DACx3508 has two modes of operation: normal and power-down.

### 8.4.1 Power-Down Mode

The DACx3508 DAC output amplifiers can be independently or globally powered down (10 k $\Omega$  to A<sub>GND</sub>) through the DEVICE\_CONFIG register. In this state, the device consumes 50  $\mu$ A ( $V_{DD} = 1.8$  V). At power-up, all output channels buffer amplifiers start in power down (10 k $\Omega$ -AGND) mode until a power up command is issued by writing 0 to the per-channel power-down register bits.

## 8.5 Programming

### 8.5.1 Serial Peripheral Interface (SPI)

The DACx3508 supports a three-wire SPI interface with write-only functionality. An SPI write cycle for DACx3508 is initiated by asserting the  $\overline{\text{SYNC}}$  pin low. The serial clock, SCLK, can be a continuous or gated clock. SDI data are clocked on SCLK falling edges. The SPI frame for DACx3508 is 24 bits long; therefore, the  $\overline{\text{SYNC}}$  pin must stay low for at least 24 SCLK falling edges. The write cycle ends when the  $\overline{\text{SYNC}}$  pin is deasserted high. If the write cycle contains less than the minimum clock edges, the communication is ignored. If the write cycle contains more than the minimum clock edges, only the first 24 bits are used by the device.

[Table 8-1](#) describes the format for the 24-bit SPI write access cycle. The first byte input to SDI is the instruction cycle. The instruction cycle identifies the request as the 8-bit address to be written. The last 16 bits in the cycle form the data cycle.

**Table 8-1. SPI Write Access Cycle**

BIT	FIELD	DESCRIPTION
23-16	A[7:0]	Register address: specifies the register to be accessed during the write operation.
15-0	DI[15:0]	Data cycle bits: The data cycle bits are the values written to the register with address A[7:0].

## 8.6 Register Map

Table 8-2. Register Map

REGISTER NAME	COMMAND BITS	DATA BITS												
		MSDB					LSDB							
		B23-B16	B15-B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
DEVICE_CONFIG (Section 8.6.1)	01h	X	RESERVED			PDN-AII	PDNH	PDNG	PDNF	PDNE	PDND	PDNC	PDNB	PDNA
STATUS_TRIGGER (Section 8.6.2)	02h	X	X								SW_RST			
BRDCAST (Section 8.6.3)	03h	X	BRDCAST_DATA[9:0] / BRDCAST_DATA[7:0]										X	
DACA_DATA (Section 8.6.4)	08h	X	DACA_DATA[9:0] / DACA_DATA[7:0]										X	
DACB_DATA (Section 8.6.4)	09h	X	DACB_DATA[9:0] / DACB_DATA[7:0]										X	
DACC_DATA (Section 8.6.4)	0Ah	X	DACC_DATA[9:0] / DACC_DATA[7:0]										X	
DACD_DATA (Section 8.6.4)	0Bh	X	DACD_DATA[9:0] / DACD_DATA[7:0]										X	
DACE_DATA (Section 8.6.4)	0Ch	X	DACE_DATA[9:0] / DACE_DATA[7:0]										X	
DACF_DATA (Section 8.6.4)	0Dh	X	DACF_DATA[9:0] / DACF_DATA[7:0]										X	
DACG_DATA (Section 8.6.4)	0Eh	X	DACG_DATA[9:0] / DACG_DATA[7:0]										X	
DACH_DATA (Section 8.6.4)	0Fh	X	DACH_DATA[9:0] / DACH_DATA[7:0]										X	

Table 8-3. Register Section/Block Access Type Codes

Access Type	Code	Description
W	W	Write only
W	X	Don't care
-n		Value after reset or the default value

### 8.6.1 DEVICE\_CONFIG Register (address = 01h) [reset = 00FFh]

Figure 8-3. DEVICE\_CONFIG Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
X			RESERVED			PDN-All	PDNH	PDNG	PDNF	PDNE	PDND	PDNC	PDNB	PDNA	
W-0h			W-0h			W-0b		W-FFh							

Table 8-4. DEVICE\_CONFIG Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
15-12	X	$\bar{W}$	0h	Don't care
11-9	RESERVED	$\bar{W}$	00	Reserved
8	PDN-All	$\bar{W}$	0	Global power down bit: 0: Normal operation 1: All DAC channels and internal biasing blocks are powered down.
7-0	PDNx	$\bar{W}$	FFh	Channel-specific power down bits: 0: DACx powered up 1: DACx powered down with 10 kΩ pulldown resistor to A <sub>GN</sub> D.

### 8.6.2 STATUS\_TRIGGER Register (address = 02h) [reset = 0000h]

Figure 8-4. STATUS\_TRIGGER Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
X											SW_RST				
W-000h											W-0h				

Table 8-5. STATUS\_TRIGGER Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
15-4	X	$\bar{W}$	000h	Don't care
3-0	SW_RST	$\bar{W}$	0h	Device resets to default value when this bit field is set to 1010. Other values do not have any impact.

### 8.6.3 BRDCAST Register (address = 03h) [reset = 0000h]

Figure 8-5. BRDCAST Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
X			BRDCAST_DATA[9:0] / BRDCAST_DATA[7:0]										X		
W-0h			W-000h										W-00b		

Table 8-6. BRDCAST Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
15-12	X	$\bar{W}$	0h	Don't care
11-2	BRDCAST_DATA[9:0] / BRDCAST_DATA[7:0]	$\bar{W}$	000h	Writing to the BRDCAST register forces the DAC channel to update the active register data to BRDCAST_DATA. Data are MSB-aligned in straight-binary format and follow the format below: DAC53508: { DATA[9:0] } DAC43508: { DATA[7:0], x, x } x – Don't care bits
1-0	X	$\bar{W}$	00	Don't care

### 8.6.4 DACn\_DATA Register (address = 08h to 0Fh) [reset = 0000h]

Figure 8-6. DACn\_DATA Register

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
X				DACn_DATA[9:0] / DACn_DATA[7:0]											X
$\overline{W}$ -0h				$\overline{W}$ -000h											$\overline{W}$ -00b

Table 8-7. DACn\_DATA Register Field Descriptions

BIT	FIELD	TYPE	RESET	DESCRIPTION
15-12	X	$\overline{W}$	0h	Don't care
11-2	DACn_DATA[9:0] / DACn_DATA[7:0]	$\overline{W}$	000h	Writing to the DACn_DATA register forces the respective DAC channel to update the active register data to the DACn_DATA. Data are MSB-aligned in straight-binary format and follow the format below: DAC53508: { DATA[9:0] } DAC43508: { DATA[7:0], x, x } x – Don't care bits
1-0	X	$\overline{W}$	00	Don't care



## 9 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.


### 9.1 Application Information

The DACx3508 is a buffered output, eight-channel, low-power DAC available in a tiny 3-mm x 3-mm package. The multichannel, low power, and small package makes this DAC an excellent choice for general-purpose applications in wide range of end equipment. Some of the most-common applications for these devices are LED biasing-in multifunction printers, power-supply supervision with programmable comparators, offset and gain trimming in precision circuits, and power-supply margining.

### 9.2 Typical Applications

#### 9.2.1 Programmable LED Biasing

End equipments such as multifunction printers, projectors and electronic point-of-sale (EPOS) require a steady luminous intensity from the LED. [Figure 9-1](#) shows a simplified circuit diagram for biasing an LED using the DAC53508.

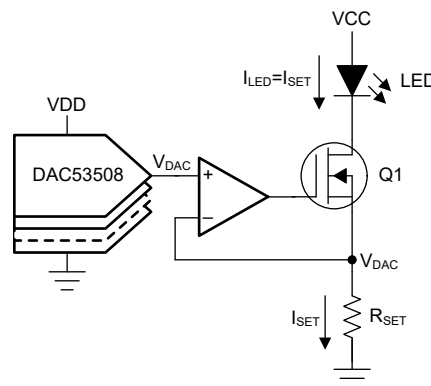

**Figure 9-1. Programmable LED Biasing**

##### 9.2.1.1 Design Requirements

- Programmable constant current through an LED tied to a power supply on one end
- DAC output range: 0 V to 5 V
- LED current range: 0 mA to 20 mA

### 9.2.1.2 Detailed Design Procedure


The DAC is used to set the source current of a MOSFET using a unity-gain buffer, as shown in [Figure 9-1](#). Connect the LED between the power supply and the drain of the MOSFET. This configuration allows the DAC to control or set the amount of current through the LED. The buffer following the DAC controls the gate-source voltage of the MOSFET inside the feedback loop, thus compensating this drop and corresponding drift due to temperature, current, and ageing of the MOSFET. The current set by the DAC that flows through the LED is calculated with [Equation 2](#). To generate 0 mA to 20 mA from a 0 V to 5 V DAC output range, a 250-Ω R<sub>SET</sub> is required.

$$I_{SET} = \frac{V_{DAC}}{R_{SET}} \quad (2)$$

The following pseudocode is provided to help get started with the LED biasing application:

```
//SYNTAX: WRITE <REGISTER NAME(Hex Code)>, <DATA>
//Power-up the device and channels
WRITE DEVICE_CONFIG(0x01), 0x0000
//Program mid code (or the desired voltage) on all channels
WRITE DACA_DATA(0x08), 0x07FC //10-bit MSB aligned
WRITE DACB_DATA(0x09), 0x07FC //10-bit MSB aligned
WRITE DACC_DATA(0x0A), 0x07FC //10-bit MSB aligned
WRITE DACD_DATA(0x0B), 0x07FC //10-bit MSB aligned
WRITE DACE_DATA(0x0C), 0x07FC //10-bit MSB aligned
WRITE DACF_DATA(0x0D), 0x07FC //10-bit MSB aligned
WRITE DACG_DATA(0x0E), 0x07FC //10-bit MSB aligned
WRITE DACH_DATA(0x0F), 0x07FC //10-bit MSB aligned
```


### 9.2.1.3 Application Curve

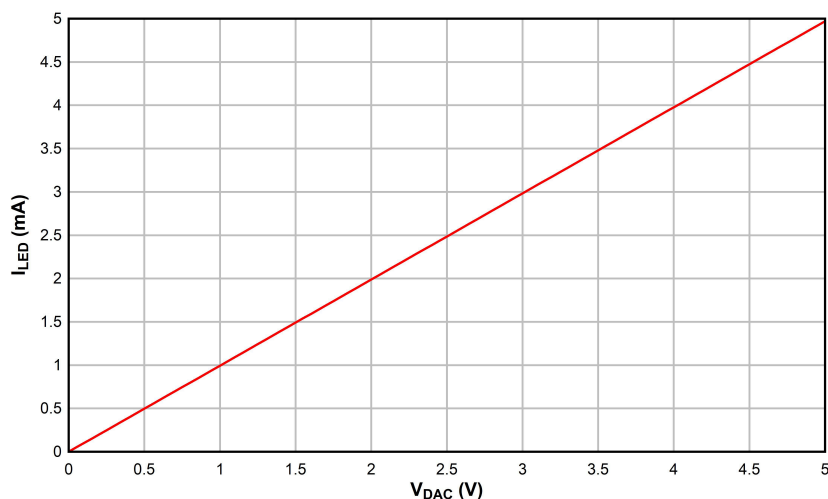

**Figure 9-2. DC Transfer Characteristics of LED Biasing Circuit**

## 9.2.2 Programmable Window Comparator

End equipment that use a centralized power supply (such as network servers, optical modules, and others) require the monitoring of power buses to protect the components. This monitoring or supervision is accomplished using a window comparator. A window comparator monitors a signal input for upper- and lower-threshold violations. A trigger signal is generated when the threshold violations occur. Multichannel monitoring is required to supervise all power supplies available in a module. The DACx3508 provides an easy-to-use, low-footprint method to address this requirement. Figure 9-3 shows how the DAC53508 is used to create a programmable window comparator.

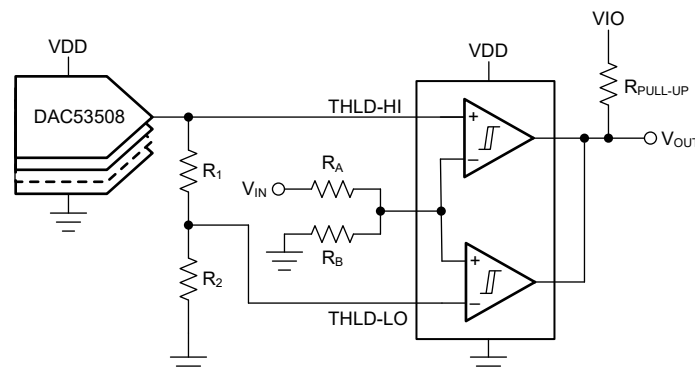

**Figure 9-3. Programmable Window Comparator**

### 9.2.2.1 Design Requirements

- Voltage to be monitored: 5 V
- High threshold: 5 V + 10%
- Low threshold: 5 V – 10%
- Trigger output: 3.3-V open-drain single output

### 9.2.2.2 Detailed Design Procedure

Figure 9-3 provides an example in which single DAC channel is used to compare both high and low thresholds. A dual comparator is used per DAC channel, as shown. A voltage divider formed by resistors  $R_A$  and  $R_B$  are used in order to bring the signal level within the DAC range. Another pair of resistors,  $R_1$  and  $R_2$ , are used to settle the low threshold as a factor of the high threshold. This configuration allows the use of a single DAC channel to monitor both the high- and low-threshold levels. Use open-drain comparators to provide the following advantages.

- Generate a logic output level appropriate for the monitoring processor
- Allow shorting of the two outputs to generate a single trigger

In the circuit depicted in Figure 9-3, the output of the circuit remains high as long as the signal input remains within the high- and low-threshold levels. Upon violation of any one threshold, the output goes low. Equation 3 provides the derivation of the low threshold voltage from the high threshold set by the DAC.

$$V_{\text{THLD-LO}} = V_{\text{DAC}} \times \left( \frac{R_2}{R_1 + R_2} \right) \quad (3)$$

To monitor a power supply of 5 V within  $\pm 10\%$ , place the nominal value at the DAC midcode. The output range of the DACx3508 is 0 V to 5 V, thus the midcode voltage output is 2.5 V. Therefore,  $R_A$  and  $R_B$  are chosen so that the voltage to be compared is 2.5 V. For this example,  $R_A$  equals  $R_B$ ; use 10-k $\Omega$  resistors for both. One channel of the DACx3508 must be programmed to  $V_{THLD-HI}$  (for example, 2.5 V + 5% = 2.625 V). This result corresponds to a 10-bit DAC code of  $(2^{10} / 5 \text{ V}) \times 2.625 \text{ V} = 537.6$  (0x21Ah). To generate  $V_{THLD-LO}$  (for example, 2.5 V – 5% = 2.405 V) from 2.625 V, the values of  $R_1$  and  $R_2$  are calculated as 7.5 k $\Omega$  and 82 k $\Omega$ , respectively, using Equation 3.

The following pseudocode is provided to help get started with the programmable window comparator application at the desired DAC value.

```
//SYNTAX: WRITE <REGISTER NAME(Hex Code)>, <DATA>
//Power-up the device and channels
WRITE DEVICE_CONFIG(0x01), 0x0000
//Program 2.625V on channel A
WRITE DACA_DATA(0x08), 0x0868 //10-bit MSB aligned
```

### 9.2.2.3 Application Curve

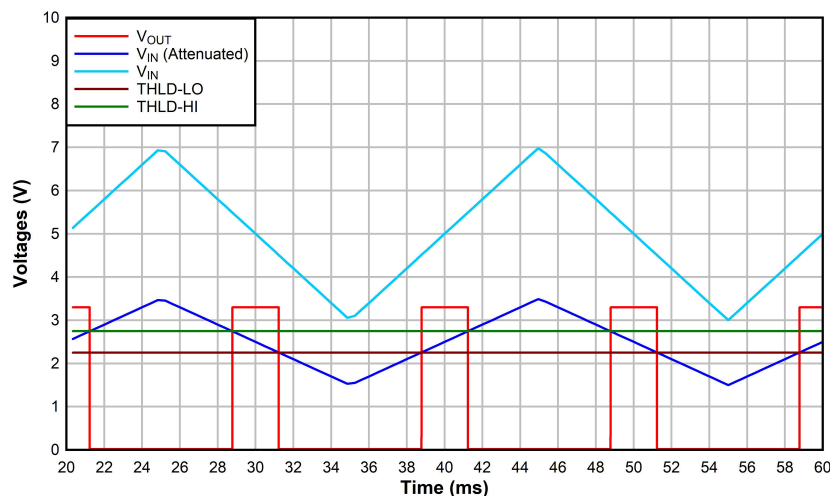


Figure 9-4. Programmable Comparator Output Waveform

## 10 Power Supply Recommendations

The DACx3508 family of devices does not require specific supply sequencing. These devices require a single power supply,  $V_{DD}$ . A 0.1- $\mu\text{F}$  decoupling capacitor is recommended for the  $V_{DD}$  pin.


## 11 Layout

### 11.1 Layout Guidelines

The DACx3508 pinout separates the analog, digital, and power pins for an optimized layout. For signal integrity, separate digital and analog traces and place decoupling capacitors close to the device pins.

### 11.2 Layout Example

Figure 11-1 shows an example layout drawing with decoupling capacitors and pullup resistors.

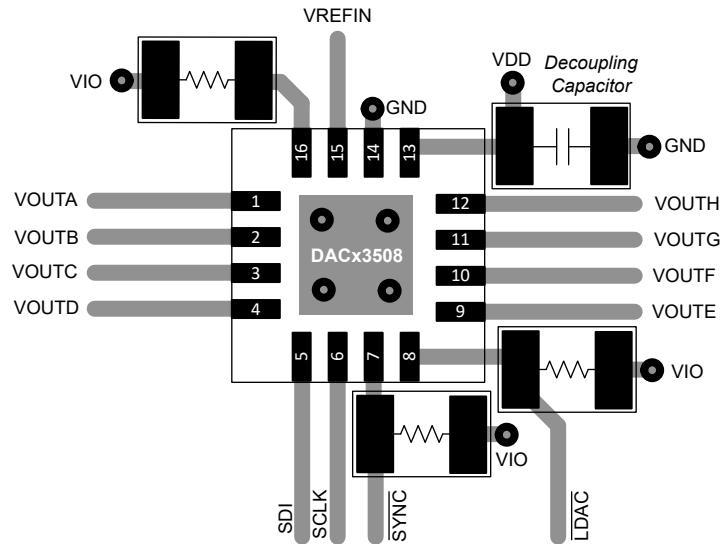

**Figure 11-1. Layout Example**

## 12 Device and Documentation Support

### 12.1 Documentation Support

#### 12.1.1 Related Documentation

For related documentation see the following: Texas Instruments, [DAC53608EVM user's guide](#)

### 12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.3 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 12.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.  
All trademarks are the property of their respective owners.

### 12.5 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 12.6 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
DAC43508RTER	ACTIVE	WQFN	RTE	16	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	D43508	<a href="#">Samples</a>
DAC53508RTER	ACTIVE	WQFN	RTE	16	3000	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	D53508	<a href="#">Samples</a>
DAC53508RTET	ACTIVE	WQFN	RTE	16	250	RoHS & Green	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	D53508	<a href="#">Samples</a>

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
DAC43508RTER	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
DAC53508RTER	WQFN	RTE	16	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
DAC53508RTET	WQFN	RTE	16	250	180.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
DAC43508RTER	WQFN	RTE	16	3000	367.0	367.0	35.0
DAC53508RTER	WQFN	RTE	16	3000	367.0	367.0	35.0
DAC53508RTET	WQFN	RTE	16	250	210.0	185.0	35.0

## GENERIC PACKAGE VIEW

**RTE 16**

**WQFN - 0.8 mm max height**

3 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



4225944/A




# EXAMPLE BOARD LAYOUT


RTE0016C

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

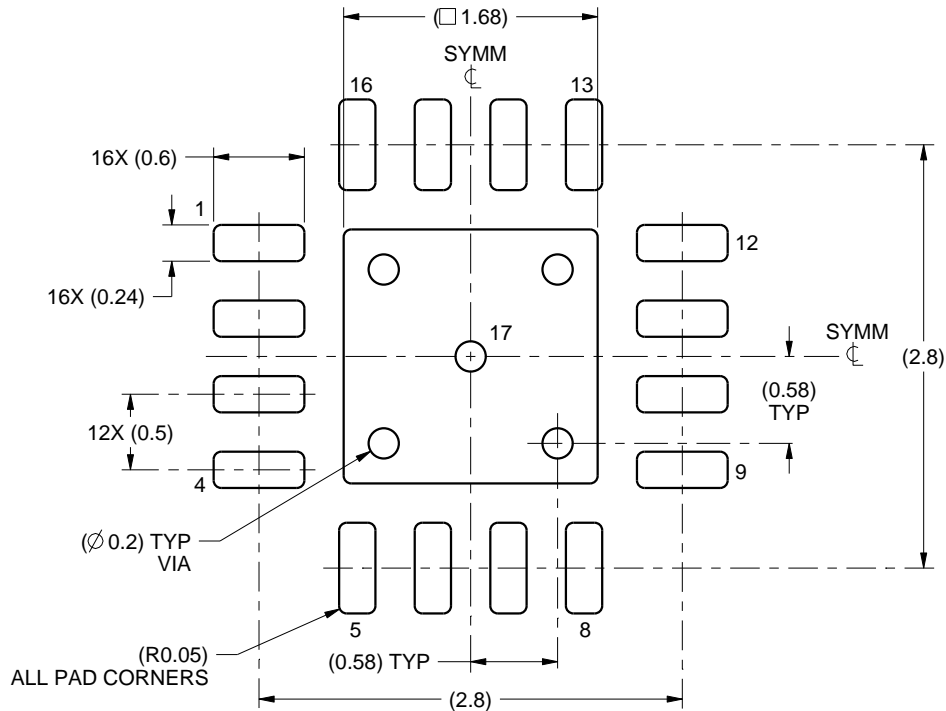

LAND PATTERN EXAMPLE  
SCALE:20X

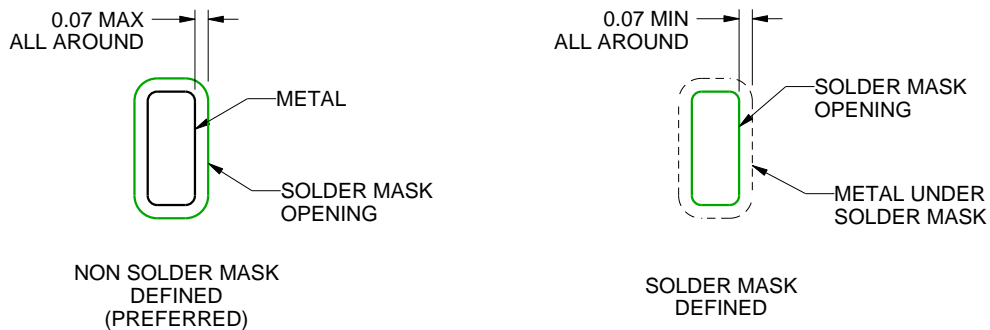

SOLDER MASK DETAILS

4219117/A 09/2016

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RTE0016C

WQFN - 0.8 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

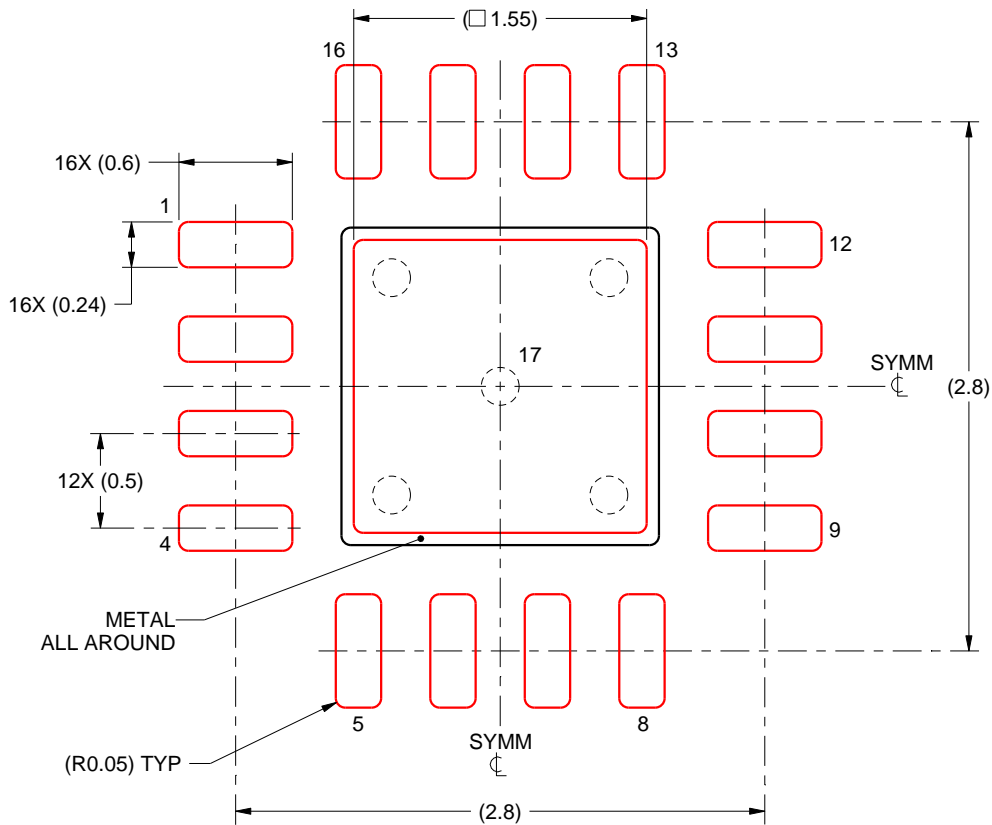

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 17:  
85% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:25X

4219117/A 09/2016

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](http://ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2022, Texas Instruments Incorporated